


<b>ACO CABLEMATE®</b>	<b>POLYCRETE® PIT INSTALLATION DRAWING</b>	
DRWG# XCPC-AG-3 www.aconz.co.nz	<b>With Polycrete® Lid / Cement Concrete Lid</b>	
<b>Grass: For 330kg Nominal Wheel Load</b>		

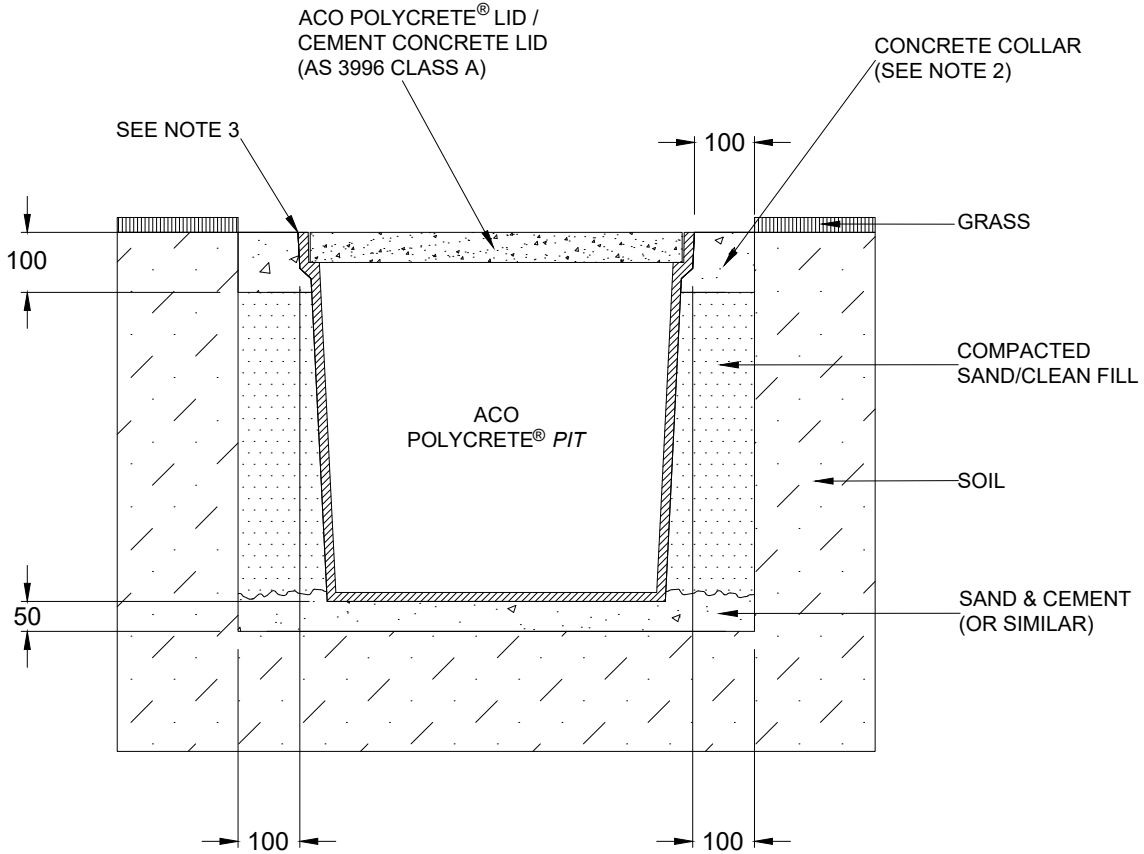

- NOTES:**
1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the installation drawing is detailed for the application and pit structure is protected from undue stress. *Engineering advice may be required.*
  2. Concrete should be vibrated to eliminate air pockets.
  3. The finished level of the concrete collar must be flush with the top of the pit.
  4. Refer to ACO's latest installation instructions for complete details.

<b>ACO CABLEMATE®</b>	<b>POLYCRETE® PIT SPECIFICATION CLAUSE</b>	ACO Limited Unit F/6 Percival Gull Place Mangere, Auckland 2022 Tel: 0800 448 080 Fax: +64 9255 5114 Email: info@aconz.co.nz
DRWG# XCPC-AG-3 www.aconz.co.nz	<b>With Polycrete® Lid / Cement Concrete Lid</b>	

The cable enclosure(s) (for a nominal wheel load of 330kg) with a *clear opening(s)* of ..... shall be **Polycrete® Pit(s) Type (s)** ..... and *part no.(s)* ..... with **Polycrete® lid(s) / Cement Concrete lid(s)** and *part no.(s)* .....

All materials and components within the scope of the system shall be obtained from ACO and the work shall be carried out as specified in accordance with the manufacturer installation recommendations.