


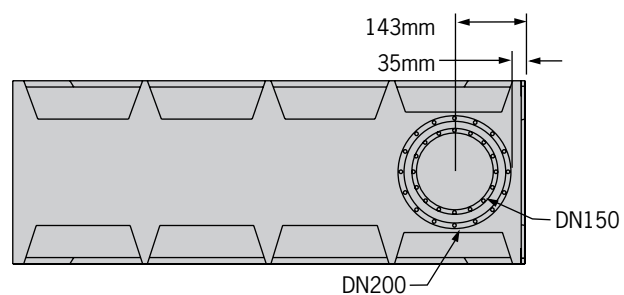



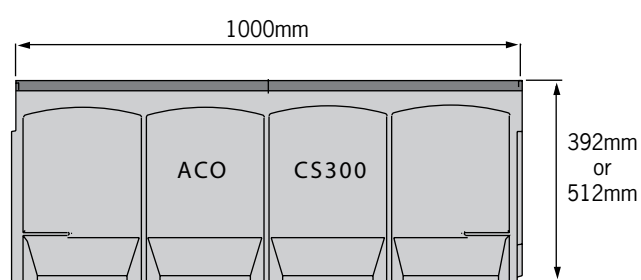

**One metre duct**

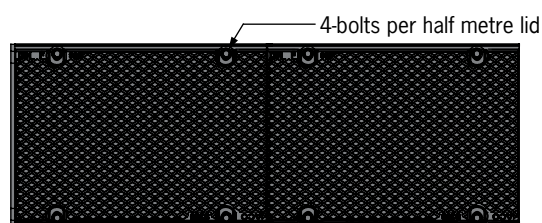

**End cap**



## ACO CABLEMATE

## CS300 polymer concrete cable duct with 4-bolt solid iron lids



## Cable duct

Description	Part No.	Weight (kg)	
		cover	total
CS3000 polymer concrete duct with ductile iron lids - 1m	76561	22	112
CS3020 polymer concrete duct with ductile iron lids - 1m	76586	22	122
CS300 End cap	93849	1.2	

## Notes

1. CS300 duct is sold complete, with duct and lids.
2. Preformed drill-outs for DN150 and DN200 pipe on underside of duct.

## Specifications

## General

The cable duct shall be ACO Cablemate CS300 Class E solid ductile iron 4-bolt lids as manufactured by ACO Pty Ltd.

## Materials

Duct system bodies are manufactured from polymer concrete with minimum properties as follows:

Electrical resistivity	1 x 10 <sup>8</sup> Ω /sq
Compressive strength:	96MPa
Flexural strength:	27MPa
Water absorption	0.07%
Frost proof / Salt proof	
Dilute acid and alkali resistant	
Surface burn characteristics of the material shall comply with UL 723	
IP ratings up to IP4X (AS 60529) - enclosure protection against ingress	

The nominal clear opening shall be 300mm with overall width of 360mm. Modular units shall be manufactured with neutral invert and have a wall thickness of at least 16mm. Each unit will feature a radius in the duct bottom and a male to female interconnecting end profile. Units shall have horizontal cast in anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface. The ductile iron edge rail will be integrally cast in by the manufacturer to ensure maximum homogeneity between polymer concrete body and edge rail.

## Lids

Lids are manufactured from ductile iron compliant to (AS 3996 Class E) and offer IP4X (AS 60529) protection against ingress of foreign objects. Lids are locked in place with 4 qty M10 high tensile steel bolts with friction grip washers per half metre lid. After removal of lids there shall be uninterrupted access to the duct.

## Installation

The cable duct system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

**ACO Limited**  
**New Zealand**  
 Ph: 0800 448 080  
[www.aconz.co.nz](http://www.aconz.co.nz)  
[sales@aconz.co.nz](mailto:sales@aconz.co.nz)

© October 2020 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited, pursues a policy of continuous product development and reserves the right to amend specifications without notice.

