
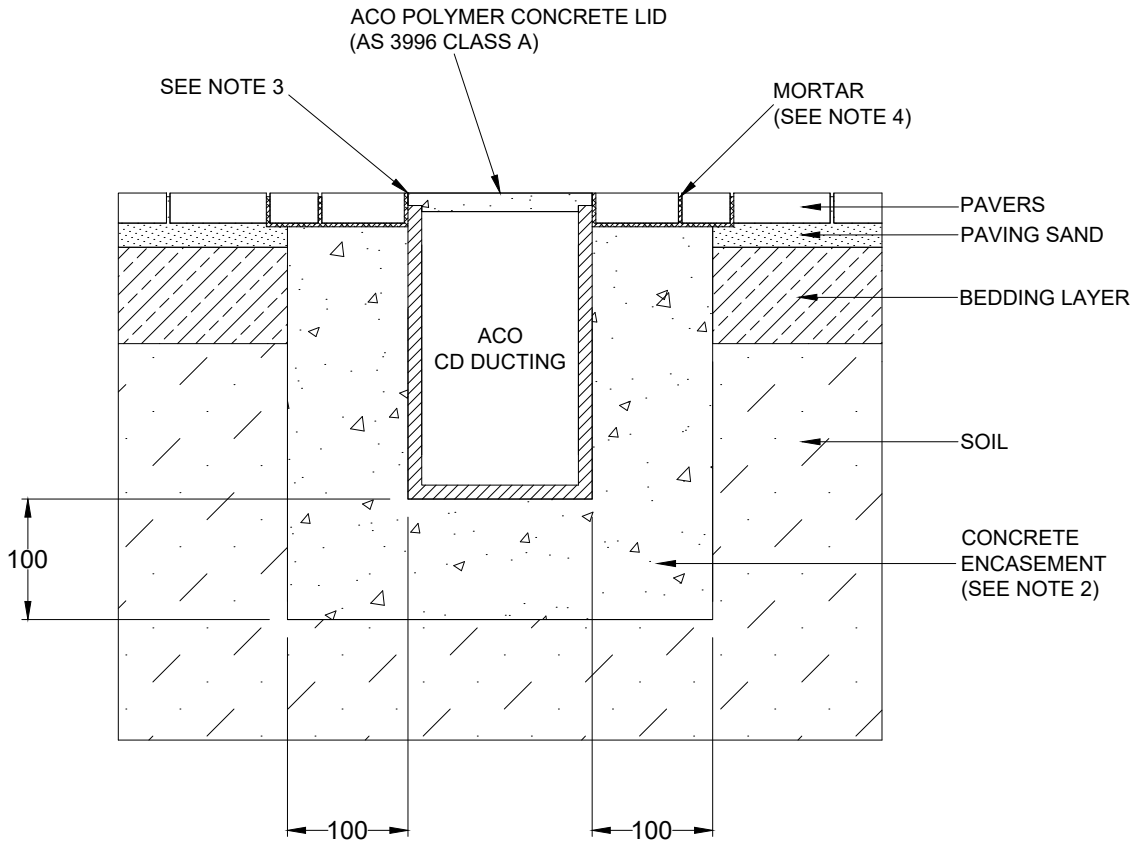


ACO CABLEMATE®	CABLE DUCTING INSTALLATION DRAWING	
DRWG# XCCD-AP www.aconz.co.nz	With Polymer Concrete Lid	
Pavers: For 330kg Nominal Wheel Load		



NOTES:

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the pavers must be flush with the top of the lid.
4. The paver course adjacent to the ducting edge must be fully bonded to the concrete encasement and ducting edge.
5. Refer to ACO's latest installation instructions for complete details.

ACO CABLEMATE®	CABLE DUCTING SPECIFICATION CLAUSE	ACO Limited Unit F/6 Percival Gull Place Mangere, Auckland 2022 Tel: 0800 448 080 Fax: +64 9255 5114 Email: info@aconz.co.nz
DRWG# XCCD-AP www.aconz.co.nz	With Polymer Concrete Lid	

The surface cable ducting system (for a nominal wheel load of 330kg) with *clear opening(s) of* shall be **ACO Cablemate® CD.....** ducting channel(s) and *part no.(s)* with Polymer Concrete lid(s) and *part no.(s)*

All materials and components within the scope of this system shall be obtained from ACO Polycrete Pty Ltd and the work shall be carried out as specified in accordance with the manufacturer installation recommendations.